



Pioneer's brand-new universal disc player brings the spectacle of Ultra HD Blu-ray™ to your home entertainment, with four times the resolution of 1080p Full HD. Featuring three-block internal layout, Ultra Rigid Construction, and Double-Layered Chassis for a robust build, 6-layered main circuit board, SDR/HDR preset mode, and support for HDR10/Dolby Vision for quality picture, as well as premium audio DAC and Zero Signal Terminal for high-grade sound, the UDP-LX500 lets you enjoy the highest video resolution as well as your other digital disc collections.

CONSTRUCTION

- › Three-Block Internal Layout (Power Supply, Drive/Digital Processing, Analogue Audio)
- › Ultra-Rigid Construction without Radiation Holes
- › Double-Layered Chassis Reinforced with 3 mm Steel Plate for Rigidity and Low Centre of Gravity
- › 6-Layered Main Circuit Board for High S/N Ratio
- › Rigid & Quiet UHD BD Drive
 - Honeycomb Mechanism Drive Cover
 - Acoustic Damper Tray
 - Float-Mounting Structure

VIDEO FEATURES

- › Ultra HD Blu-ray Playback
- › SDR/HDR Preset Mode for Optimal Performance for the Display
- › Video Adjust
- › HDR10
- › Dolby Vision (Low Latency Compatible)
- › 36-bit Deep Colour/"x.v.Colour"

AUDIO FEATURES

- › Highly Precise D/A Conversion
- › Direct Function for Pure Analogue Audio Output
- › Dual HDMI Output
- › PQLS Jitter-less Sound Transmission via HDMI (with compatible AV Receiver)

CONVENIENCE

- › Disc Information On-Screen Display
- › BD-Live/BONUSVIEW
- › Continued Viewing Playback
- › 30 sec Skip Forward/10 sec Skip Back
- › Auto Power Off
- › Firmware Update (USB/Network)
- › Self-Illuminating Remote Control

PLAYBACK MEDIA

- › BD-ROM (UHDBD/3D BD/BD)/BD-R (DL)/BD-R LTH/BD-RE (DL)
- › DVD-ROM (DVD-Video/DVD-Audio)/DVD-R (DL)/DVD-RW/DVD+R (DL)/DVD+RW
- › Audio CD (CD-DA/SACD)/CD-ROM/CD-R/CD-RW
- › USB Memory/HDD

TERMINALS

- › HDMI 2 Out (1 Main for Audio/Video, 1 Sub for Audio)
- › Digital Coaxial Out
- › Digital Optical Out
- › USB 2 In (1 Front, 1 Rear)
- › Ethernet
- › RS-232C
- › Analogue Audio Out (Unbalanced)
- › Zero Signal Terminal (for Audio/Video Quality Tuning)

SPECIFICATIONS

- › Power Requirements: AC 110-240 V, 50/60 Hz (Asia)/AC 120 V, 60 Hz (Taiwan)
- › Power Consumption: 28 W
- › Power Consumption During Standby: Full 0.45 W (Asia)/0.4 W (Taiwan), Network Standby On 1.3 W (Asia)/1.2 W (Taiwan)
- › Dimensions (W X H x D): 435 x 118 x 337 mm
- › Weight: 10.3 kg



UDP-LX500(B)CVQ3AP (Asia model)



UDP-LX500(B)CVF3AN (Taiwan model)

Three-Block Internal Layout

The blocks for power supply, drive/digital processing, and analogue audio are separated into three to eliminate electrical and magnetic interference between the blocks.



Ultra-Rigid Construction without Radiation Holes

Even the holes for heat radiation are excluded to realise a flat form with optimal electric circuit design, and minimum mechanical noise from the rotating system. The result is significantly low noise and even more rigid and stable chassis structure.

Double-Layered Chassis with Rigid Under Base for Rigidity and Low Centre of Gravity

The 1.6 mm-thick chassis base is reinforced with a 3 mm-thick steel plate Rigid Under Base. This Double-Layered Chassis structure provides a low centre-of-gravity and overall rigidity that prevents the transfer of external vibration to the inner chassis, and offers a superior reading of the disc.

Ultra HD Blu-ray Playback

Ultra HD Blu-ray is the latest disc format with up to 3,840 x 2,160 pixels, four times the resolution of 1080p Full HD. In addition to Ultra HD Blu-ray, the UDP-LX500 is compatible with regular Blu-ray™, DVD, SACD, and audio CD, so you can enjoy the highest video resolution, as well as your digital disc collection on a single disc player.

6-Layered Main Circuit Board for High S/N Ratio

A 6-layered IVH is used for the main circuit board to thoroughly eliminate digital noise. This optimises the digital signal wiring and minimises GND impedance, and dramatically improves S/N ratio in audio/video signal processing. The 18 Gbps transmission through the latest HDMI standard becomes even more precise.



SDR/HDR Preset Mode for Optimal Performance for the Display

In addition to the video parameter "Reference" for reproducing the original master quality, you can select "LCD TV," "OLED TV," or "Projector" for the video quality best suited to your display. Additionally, there are SDR/HDR presets for each video parameter, that automatically switches between SDR preset and HDR preset according to the output signal.


Disc Information On-Screen Display

You can display the disc information on your screen by pressing and holding the remote control's DISPLAY button. In addition to the playing disc's details, you can easily check mastering information such as MaxFALL (Maximum Frame Average Light Level) and MaxCLL (Maximum Content Light Level) available on some HDR content, as well as HDMI output information.

Media Information		HDR Information	
Resolution	3840 x 2160	Mastering Display	
Frame Rate	23.976p	Chromaticity (White)	x = 0.3127, y = 0.3290
HDR Format	HDR10	Chromaticity (Red)	x = 0.6845, y = 0.3200
Color Space	BT.2020 YCbCr4:2:0	Chromaticity (Green)	x = 0.2653, y = 0.6900
Deep Color	10bit	Chromaticity (Blue)	x = 0.1506, y = 0.0660
Video Format	HEVC	Max. Light Level	4000nit
Video Bitrate	50.7 Mbps	Min. Light Level	0.0050nit
Audio Format	Dolby TrueHD Multi ASX	Max. Content Light Level	1888nit
Audio Bitrate	281.6 kbps	Min. Frame-average Light Level	0.0001nit
Audio Channel	Multi	Electro-Optical Transfer Function	ST 2084


PQLS Jitter-less Sound Transmission

With the precision quartz controller on a compatible AV receiver, Pioneer's PQLS (Precision Quartz Lock System) eliminates distortion caused by timing errors. It controls the amount of audio signals from the AV receiver to the UDP-LX500, giving the best possible digital-to-analogue conversion. UDP-LX500 supports PQLS 2ch Audio, Multi-Surround, and Bit-stream.

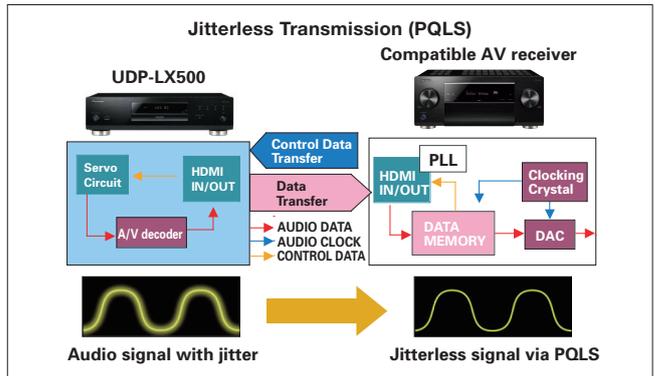

Zero Signal Terminal

The Zero Signal Terminal is a Pioneer-original feature dedicated to tuning audio and video quality without signal transmission. By connecting the Zero Signal Terminal with the audio/video input terminal of an AV receiver etc., the reference level (GND) of the audio/video signals is aligned between the two devices, and the potential difference is suppressed, allowing a precise and high-quality signal transmission.

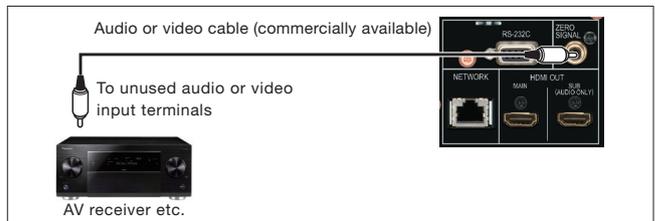

•PIONEER and the Pioneer logo are registered trademarks of Pioneer Corporation, and are used under license. •The DVD logo is a trademark of DVD Format/Logo Licensing Corporation. •"Super Audio CD" is a trademark. •DSD and the Direct Stream Digital logo are trademarks of Sony Corporation. •"x.v.Colour" is a trademark of Sony Corporation. •"AVCHD" and the "AVCHD" logo are trademarks of Panasonic Corporation and Sony Corporation. •Dolby, Dolby Surround, Dolby Vision, and the double-D symbol are trademarks of Dolby Laboratories. •For DTS patents, see <http://patents.dts.com>. Manufactured under license from DTS Licensing Limited. DTS, DTS-HD, the Symbol, DTS-HD in combination with the Symbol are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. © DTS, Inc. All Rights Reserved. •The product with the Hi-Res Audio logo is conformed to Hi-Res Audio standard defined by Japan Audio Society. The logo is used under license from Japan Audio Society. •Blu-ray Disc™, Blu-ray™, BD-LIVE™, BONUS VIEW™, Ultra HD Blu-ray™ word marks and logos are trademarks of the Blu-ray Disc Association.